

Image Processing and Computer Vision (Module 2)

Last update: 10 May 2024

Academic Year 2023 – 2024
Alma Mater Studiorum · University of Bologna

Contents

1	Camera calibration	1
1.1	Forward imaging model	1
1.1.1	Image pixelization (CRF to IRF)	1
1.1.2	Roto-translation (WRF to CRF)	2
1.2	Projective space	3
1.3	Lens distortion	6
1.3.1	Modeling lens distortion	6
1.3.2	Image formation with lens distortion	7
1.4	Zhang’s method	7
1.5	Warping	13
1.5.1	Forward mapping	13
1.5.2	Backward mapping	13
1.5.3	Undistort warping	15
2	Image classification	18
2.1	Supervised datasets	18
2.1.1	Modified NIST (MNIST)	18
2.1.2	CIFAR10	18
2.1.3	CIFAR100	18
2.1.4	ImageNet 21k	19
2.1.5	ImageNet 1k	19
2.2	Learning	19
2.2.1	Loss function	20
2.2.2	Gradient descent	21
2.3	Linear classifier	22
2.4	Bag of visual words	23
2.5	Neural networks	23
2.6	Convolutional neural networks	24
2.6.1	Image filtering	24

1 Camera calibration

World reference frame (WRF) Coordinate system (X_W, Y_W, Z_W) of the real world relative to a reference point (e.g. a corner).	World reference frame (WRF)
Camera reference frame (CRF) Coordinate system (X_C, Y_C, Z_C) that characterizes a camera.	Camera reference frame (CRF)
Image reference frame (IRF) Coordinate system (U, V) of the image. They are obtained as a perspective projection of CRF coordinates as:	Image reference frame

$$u = \frac{f}{z} x_C \quad v = \frac{f}{z} y_C$$

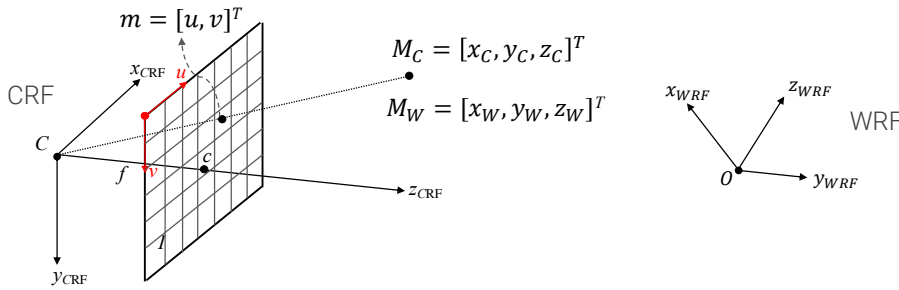


Figure 1.1: Example of WRF, CRF and IRF

1.1 Forward imaging model

1.1.1 Image pixelization (CRF to IRF)

The conversion from the camera reference frame to the image reference frame is done in two steps: Image pixelization

Discretization Given the sizes (in mm) Δu and Δv of the pixels, it is sufficient to modify the perspective projection to map CRF coordinates into a discrete grid: Discretization

$$u = \frac{1}{\Delta u} \frac{f}{z_C} x_C \quad v = \frac{1}{\Delta v} \frac{f}{z_C} y_C$$

Origin translation To avoid negative pixels, the origin of the image has to be translated from the piercing point c to the top-left corner. This is done by adding an offset (u_0, v_0) to the projection (in the new system, $c = (u_0, v_0)$): Origin translation

$$u = \frac{1}{\Delta u} \frac{f}{z_C} x_C + u_0 \quad v = \frac{1}{\Delta v} \frac{f}{z_C} y_C + v_0$$

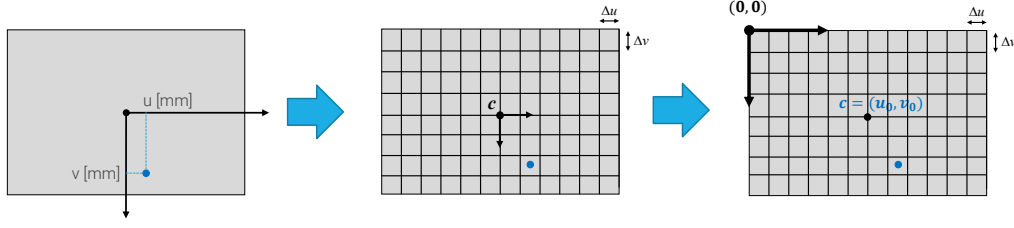


Figure 1.2: Pixelization process

Intrinsic parameters By fixing $f_u = \frac{f}{\Delta u}$ and $f_v = \frac{f}{\Delta v}$, the projection can be rewritten as:

$$u = f_u \frac{x_C}{z_C} + u_0 \quad v = f_v \frac{y_C}{z_C} + v_0$$

Therefore, there is a total of 4 parameters: f_u , f_v , u_0 and v_0 .

Remark. A more general model includes a further parameter (skew) to account for non-orthogonality between the axes of the image sensor such as:

- Misplacement of the sensor so that it is not perpendicular to the optical axis.
- Manufacturing issues.

Nevertheless, in practice skew is always 0.

1.1.2 Roto-translation (WRF to CRF)

The conversion from the world reference system to the camera reference system is done through a roto-translation wrt the optical center.

Given:

- A WRF point $\mathbf{M}_W = (x_W, y_W, z_W)$,
- A rotation matrix $\mathbf{R}$,
- A translation vector $\mathbf{t}$,

the coordinates $\mathbf{M}_C$ in CRF corresponding to $\mathbf{M}_W$ are given by:

$$\mathbf{M}_C = \begin{bmatrix} x_C \\ y_C \\ z_C \end{bmatrix} = \mathbf{R}\mathbf{M}_W + \mathbf{t} = \begin{bmatrix} r_{1,1} & r_{1,2} & r_{1,3} \\ r_{2,1} & r_{2,2} & r_{2,3} \\ r_{3,1} & r_{3,2} & r_{3,3} \end{bmatrix} \begin{bmatrix} x_W \\ y_W \\ z_W \end{bmatrix} + \begin{bmatrix} t_1 \\ t_2 \\ t_3 \end{bmatrix}$$

Remark. The coordinates $\mathbf{C}_W$ of the optical center $\mathbf{C}$ are obtained as:

$$\bar{\mathbf{0}} = \mathbf{R}\mathbf{C}_W + \mathbf{t} \iff (\bar{\mathbf{0}} - \mathbf{t}) = \mathbf{R}\mathbf{C}_W \iff \mathbf{C}_W = \mathbf{R}^T(\bar{\mathbf{0}} - \mathbf{t}) \iff \mathbf{C}_W = -\mathbf{R}^T\mathbf{t}$$

Extrinsic parameters

- The rotation matrix $\mathbf{R}$ has 9 elements of which 3 are independent (i.e. the rotation angles around the axes).
- The translation matrix $\mathbf{t}$ has 3 elements.

Therefore, there is a total of 6 parameters.

Remark. It is not possible to combine the intrinsic camera model and the extrinsic roto-translation to create a linear model for the forward imaging model.

$$u = f_u \frac{r_{1,1}x_W + r_{1,2}y_W + r_{1,3}z_W + t_1}{r_{3,1}x_W + r_{3,2}y_W + r_{3,3}z_W + t_3} + u_0 \quad v = f_v \frac{r_{2,1}x_W + r_{2,2}y_W + r_{2,3}z_W + t_2}{r_{3,1}x_W + r_{3,2}y_W + r_{3,3}z_W + t_3} + v_0$$

1.2 Projective space

Remark. In the 2D Euclidean plane $\mathbb{R}^2$, parallel lines never intersect and points at infinity cannot be represented.

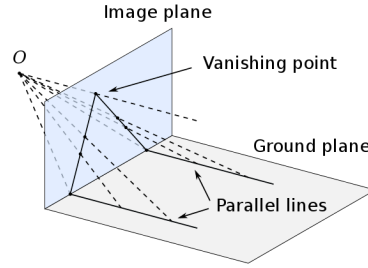


Figure 1.3: Example of point at infinity

Remark. Point at infinity is a point in space while the vanishing point is in the image plane.

Homogeneous coordinates Without loss of generality, consider the 2D Euclidean space $\mathbb{R}^2$.

Homogeneous coordinates

Given a coordinate (u, v) in Euclidean space, its homogeneous coordinates have an additional dimension such that:

$$(u, v) \equiv (ku, kv, k) \forall k \neq 0$$

In other words, a 2D Euclidean point is represented by an equivalence class of 3D points.

Projective space Space $\mathbb{P}^n$ associated with the homogeneous coordinates of an Euclidean space $\mathbb{R}^n$.

Projective space

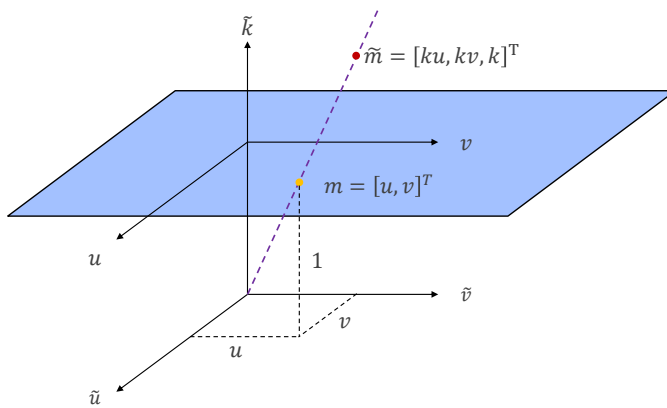


Figure 1.4: Example of projective space $\mathbb{P}^2$

Remark. $\bar{0}$ is not a valid point in $\mathbb{P}^n$.

Remark. A projective space allows to homogeneously handle both ordinary (image) and ideal (scene) points without introducing additional complexity.

Point at infinity Given the parametric equation of a 2D line defined as:

Point at infinity

$$\mathbf{m} = \mathbf{m}_0 + \lambda \mathbf{d} = \begin{bmatrix} u_0 \\ v_0 \end{bmatrix} + \lambda \begin{bmatrix} a \\ b \end{bmatrix} = \begin{bmatrix} u_0 + \lambda a \\ v_0 + \lambda b \end{bmatrix}$$

It is possible to define a generic point in the projective space along the line m as:

$$\tilde{\mathbf{m}} \equiv \begin{bmatrix} \mathbf{m} \\ 1 \end{bmatrix} \equiv \begin{bmatrix} u_0 + \lambda a \\ v_0 + \lambda b \\ 1 \end{bmatrix} \equiv \begin{bmatrix} \frac{u_0}{\lambda} + a \\ \frac{v_0}{\lambda} + b \\ \frac{1}{\lambda} \end{bmatrix}$$

The projective coordinates $\tilde{\mathbf{m}}_\infty$ of the point at infinity of a line m is given by:

$$\tilde{\mathbf{m}}_\infty = \lim_{\lambda \rightarrow \infty} \tilde{\mathbf{m}} \equiv \begin{bmatrix} a \\ b \\ 0 \end{bmatrix}$$

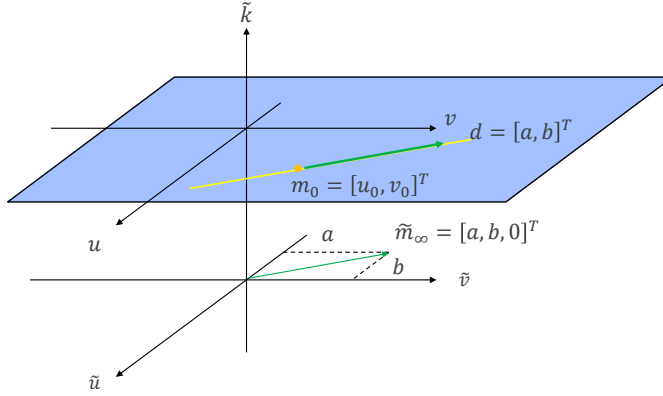


Figure 1.5: Example of infinity point in $\mathbb{P}^2$

In 3D, the definition is trivially extended as:

$$\tilde{\mathbf{M}}_\infty = \lim_{\lambda \rightarrow \infty} \begin{bmatrix} \frac{x_0}{\lambda} + a \\ \frac{y_0}{\lambda} + b \\ \frac{z_0}{\lambda} + c \\ \frac{1}{\lambda} \end{bmatrix} \equiv \begin{bmatrix} a \\ b \\ c \\ 0 \end{bmatrix}$$

Perspective projection Given a point $\mathbf{M}_C = (x_C, y_C, z_C)$ in the CRF and its corresponding point $\mathbf{m} = (u, v)$ in the image, the non-linear perspective projection in Euclidean space can be done linearly in the projective space as:

Perspective projection in projective space

$$\begin{aligned} \tilde{\mathbf{m}} &\equiv \begin{bmatrix} u \\ v \\ 1 \end{bmatrix} \equiv \begin{bmatrix} f_u \frac{x_C}{z_C} + u_0 \\ f_v \frac{y_C}{z_C} + v_0 \\ 1 \end{bmatrix} \equiv z_C \begin{bmatrix} f_u \frac{x_C}{z_C} + u_0 \\ f_v \frac{y_C}{z_C} + v_0 \\ 1 \end{bmatrix} \\ &\equiv \begin{bmatrix} f_u x_C + z_C u_0 \\ f_v y_C + z_C v_0 \\ z_C \end{bmatrix} \equiv \begin{bmatrix} f_u & 0 & u_0 & 0 \\ 0 & f_v & v_0 & 0 \\ 0 & 0 & 1 & 0 \end{bmatrix} \begin{bmatrix} x_C \\ y_C \\ z_C \\ 1 \end{bmatrix} \equiv \mathbf{P}_{\text{int}} \tilde{\mathbf{M}}_C \end{aligned}$$

Remark. The equation can be written to take account of the arbitrary scale factor k as:

$$k\tilde{\mathbf{m}} = \mathbf{P}_{\text{int}}\tilde{\mathbf{M}}_C$$

or, if k is omitted, as:

$$\tilde{\mathbf{m}} \approx \mathbf{P}_{\text{int}}\tilde{\mathbf{M}}_C$$

Remark. In projective space, we can also project in Euclidean space the point at infinity of parallel 3D lines in CRF with direction (a, b, c) :

$$\tilde{\mathbf{m}}_{\infty} \equiv \mathbf{P}_{\text{int}} \begin{bmatrix} a \\ b \\ c \\ 0 \end{bmatrix} \equiv \begin{bmatrix} f_u & 0 & u_0 & 0 \\ 0 & f_v & v_0 & 0 \\ 0 & 0 & 1 & 0 \end{bmatrix} \begin{bmatrix} a \\ b \\ c \\ 0 \end{bmatrix} \equiv \begin{bmatrix} f_u a + cu_0 \\ f_v b + cv_0 \\ c \end{bmatrix} \equiv c \begin{bmatrix} f_u \frac{a}{c} + u_0 \\ f_v \frac{b}{c} + v_0 \\ 1 \end{bmatrix}$$

Therefore, the Euclidean coordinates are:

$$\mathbf{m}_{\infty} = \begin{bmatrix} f_u \frac{a}{c} + u_0 \\ f_v \frac{b}{c} + v_0 \end{bmatrix}$$

Note that this is not possible when $c = 0$ (i.e. the line is parallel to the image plane).

Intrinsic parameter matrix The intrinsic transformation can be expressed through a matrix:

Intrinsic parameter matrix

$$\mathbf{A} = \begin{bmatrix} f_u & 0 & u_0 \\ 0 & f_v & v_0 \\ 0 & 0 & 1 \end{bmatrix}$$

$\mathbf{A}$ is always upper right triangular and models the characteristics of the imaging device.

Remark. If skew is considered, it would be at position $(1, 2)$.

Extrinsic parameter matrix The extrinsic transformation can be expressed through a matrix:

Extrinsic parameter matrix

$$\mathbf{G} = \begin{bmatrix} \mathbf{R} & \mathbf{t} \\ \bar{\mathbf{0}} & 1 \end{bmatrix} = \begin{bmatrix} r_{1,1} & r_{1,2} & r_{1,3} & t_1 \\ r_{2,1} & r_{2,2} & r_{2,3} & t_2 \\ r_{3,1} & r_{3,2} & r_{3,3} & t_3 \\ 0 & 0 & 0 & 1 \end{bmatrix}$$

Perspective projection matrix (PPM) As the following hold:

Perspective projection matrix

$$\mathbf{P}_{\text{int}} = [\mathbf{A} | \bar{\mathbf{0}}] \quad \tilde{\mathbf{M}}_C \equiv \mathbf{G}\tilde{\mathbf{M}}_W$$

The perspective projection can be represented in matrix form as:

$$\tilde{\mathbf{m}} \equiv \mathbf{P}_{\text{int}}\tilde{\mathbf{M}}_C \equiv \mathbf{P}_{\text{int}}\mathbf{G}\tilde{\mathbf{M}}_W \equiv \mathbf{P}\tilde{\mathbf{M}}_W$$

where $\mathbf{P} = \mathbf{P}_{\text{int}}\mathbf{G}$ is the perspective projection matrix. It is full-rank and has shape 3×4 .

Remark. Every full-rank 3×4 matrix is a PPM.

Canonical perspective projection PPM of form:

$$P \equiv [I|\bar{0}]$$

Canonical
perspective
projection

It is useful to represent the core operations carried out by a perspective projection as any general PPM can be factorized as:

$$P \equiv A[I|\bar{0}]G$$

where:

- G converts from WRT to CRF.
- $[I|\bar{0}]$ performs the canonical perspective projection (i.e. divide by the third coordinate).
- A applies camera specific transformations.

A further factorization is:

$$P \equiv A[I|\bar{0}]G \equiv A[I|\bar{0}] \begin{bmatrix} R & \mathbf{t} \\ \bar{0} & 1 \end{bmatrix} \equiv A[R|\mathbf{t}]$$

1.3 Lens distortion

The PPM is based on the pinhole model and is unable to capture distortions that a lens introduces.

Radial distortion Deviation from the ideal pinhole caused by the lens curvature.

Radial distortion

Barrel distortion Defect associated with wide-angle lenses that causes straight lines to bend outwards.

Barrel distortion

Pincushion distortion Defect associated with telephoto lenses that causes straight lines to bend inwards.

Pincushion
distortion




Figure 1.6: Example of distortions w.r.t. a perfect rectangle

Tangential distortion Second-order effects caused by misalignment or defects of the lens (i.e. capture distortions that are not considered in radial distortion).

1.3.1 Modeling lens distortion

Lens distortion can be modeled using a non-linear transformation that maps ideal (undistorted) image coordinates $(x_{\text{undist}}, y_{\text{undist}})$ into the observed (distorted) coordinates (x, y) :

Modeling lens
distortion

$$\begin{bmatrix} x \\ y \end{bmatrix} = \underbrace{L(r) \begin{bmatrix} x_{\text{undist}} \\ y_{\text{undist}} \end{bmatrix}}_{\text{Radial distortion}} + \underbrace{\begin{bmatrix} dx(x_{\text{undist}}, y_{\text{undist}}, r) \\ dy(x_{\text{undist}}, y_{\text{undist}}, r) \end{bmatrix}}_{\text{Tangential distortion}}$$

where:

- r is the distance from the distortion center which is usually assumed to be the piercing point $c = (0, 0)$. Therefore, $r = \sqrt{(x_{\text{undist}})^2 + (y_{\text{undist}})^2}$.
- $L(r)$ is the radial distortion function which is a linear operator defined for positive r only and is approximated using the Taylor series:

$$L(0) = 1 \quad L(r) = 1 + k_1 r^2 + k_2 r^4 + k_3 r^6 + \dots$$

where k_i are additional intrinsic parameters.

- The tangential distortion is approximated as:

$$\begin{bmatrix} dx(x_{\text{undist}}, y_{\text{undist}}, r) \\ dy(x_{\text{undist}}, y_{\text{undist}}, r) \end{bmatrix} = \begin{bmatrix} 2p_1 x_{\text{undist}} y_{\text{undist}} + p_2 (r^2 + 2(x_{\text{undist}})^2) \\ 2p_1 y_{\text{undist}} x_{\text{undist}} + p_2 (r^2 + 2(y_{\text{undist}})^2) \end{bmatrix}$$

where p_1 and p_2 are additional intrinsic parameters.

Remark. This approximation has empirically been shown to work.

Remark. The additivity of the two distortions is an assumption. Other models might add arbitrary complexity.

1.3.2 Image formation with lens distortion

Lens distortion is applied after the canonical perspective projection. Therefore, the complete workflow for image formation becomes the following:

Image formation
with lens distortion

1. Transform points from WRF to CRF:

$$\mathbf{G}\tilde{\mathbf{M}}_W \equiv \begin{bmatrix} x_C & y_C & z_C & 1 \end{bmatrix}^T$$

2. Apply the canonical perspective projection:

$$\begin{bmatrix} \frac{x_C}{z_C} & \frac{y_C}{z_C} \end{bmatrix}^T = \begin{bmatrix} x_{\text{undist}} & y_{\text{undist}} \end{bmatrix}^T$$

3. Apply the lens distortion non-linear mapping:

$$L(r) \begin{bmatrix} x_{\text{undist}} \\ y_{\text{undist}} \end{bmatrix} + \begin{bmatrix} dx(x_{\text{undist}}, y_{\text{undist}}, r) \\ dy(x_{\text{undist}}, y_{\text{undist}}, r) \end{bmatrix} = \begin{bmatrix} x \\ y \end{bmatrix}$$

4. Transform points from CRF to IRF:

$$\mathbf{A} \begin{bmatrix} x \\ y \\ 1 \end{bmatrix} \equiv \begin{bmatrix} ku \\ kv \\ k \end{bmatrix} \mapsto \begin{bmatrix} u \\ v \end{bmatrix}$$

1.4 Zhang's method

Calibration patterns There are two approaches to camera calibration:

Calibration patterns

- Use a single image of a 3D calibration object (i.e. image with at least 2 planes with a known pattern).
- Use multiple (at least 3) images of the same planar pattern (e.g. a chessboard).

Remark. In practice, it is easier to get multiple images of the same pattern.

Algebraic error	Error minimized to estimate an initial guess for a subsequent refinement step. It should be cheap to compute.	Algebraic error
Geometric error	Error minimized to match the actual geometrical location of a problem.	Geometric error
Zhang's method	Algorithm to determine the intrinsic and extrinsic parameters of a camera setup given multiple images of a pattern.	Zhang's method

Image acquisition Acquire n images of a planar pattern with c internal corners.

Consider a chessboard for which we have prior knowledge of:

- The number of internal corners,
- The size of the squares.

Remark. To avoid ambiguity, the number of internal corners should be odd along one axis and even along the other (otherwise, a 180° rotation of the board would be indistinguishable).

The WRF can be defined such that:

- The origin is always at the same corner of the chessboard.
- The z -axis is at the same level of the pattern so that $z = 0$ when referring to points of the chessboard.
- The x and y axes are aligned to the grid of the chessboard. x is aligned along the short axis and y to the long axis.

Remark. As each image has its own extrinsic parameters, during the execution of the algorithm, for each image i will be computed an estimate of its own extrinsic parameters $\mathbf{R}_i$ and $\mathbf{t}_i$.

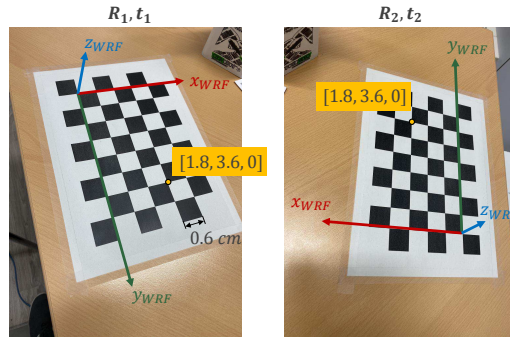


Figure 1.7: Example of two acquired images

Initial homographies guess For each image i , compute an initial guess of its homography $\mathbf{H}_i$.

Due to the choice of the z -axis position, the perspective projection matrix and the WRF points can be simplified:

$$\begin{aligned}
 k\tilde{\mathbf{m}} = k \begin{bmatrix} u \\ v \\ 1 \end{bmatrix} &= \mathbf{P}\tilde{\mathbf{M}}_W = \begin{bmatrix} p_{1,1} & p_{1,2} & \cancel{p_{1,3}} & p_{1,4} \\ p_{2,1} & p_{2,2} & \cancel{p_{2,3}} & p_{2,4} \\ p_{3,1} & p_{3,2} & \cancel{p_{3,3}} & p_{3,4} \end{bmatrix} \begin{bmatrix} x \\ y \\ \emptyset \\ 1 \end{bmatrix} \\
 &= \begin{bmatrix} p_{1,1} & p_{1,2} & p_{1,4} \\ p_{2,1} & p_{2,2} & p_{2,4} \\ p_{3,1} & p_{3,2} & p_{3,4} \end{bmatrix} \begin{bmatrix} x \\ y \\ 1 \end{bmatrix} = \mathbf{H}\tilde{\mathbf{w}}
 \end{aligned}$$

where $\mathbf{H}$ is a homography and represents a general transformation between projective planes.


DLT algorithm Consider the i -th image with its c corners. For each corner j , we have prior knowledge of:

- Its 3D coordinates in the WRF.
- Its 2D coordinates in the IRF.

Then, for each corner j , we can define 3 linear equations where the homography $\mathbf{H}_i$ of the i -th image is the unknown:

$$\tilde{\mathbf{m}}_{i,j} \equiv \begin{bmatrix} u_{i,j} \\ v_{i,j} \\ 1 \end{bmatrix} \equiv \begin{bmatrix} p_{i,1,1} & p_{i,1,2} & p_{i,1,4} \\ p_{i,2,1} & p_{i,2,2} & p_{i,2,4} \\ p_{i,3,1} & p_{i,3,2} & p_{i,3,4} \end{bmatrix} \begin{bmatrix} x_j \\ y_j \\ 1 \end{bmatrix} \equiv \mathbf{H}_i \tilde{\mathbf{w}}_j \equiv \underbrace{\begin{bmatrix} \mathbf{h}_{i,1}^T \\ \mathbf{h}_{i,2}^T \\ \mathbf{h}_{i,3}^T \end{bmatrix}}_{\mathbb{R}^{3 \times 3}} \tilde{\mathbf{w}}_j \equiv \underbrace{\begin{bmatrix} \mathbf{h}_{i,1}^T \tilde{\mathbf{w}}_j \\ \mathbf{h}_{i,2}^T \tilde{\mathbf{w}}_j \\ \mathbf{h}_{i,3}^T \tilde{\mathbf{w}}_j \end{bmatrix}}_{\mathbb{R}^{3 \times 1}}$$

Geometrically, we can interpret $\mathbf{H}_i \tilde{\mathbf{w}}_j$ as a point in $\mathbb{P}^2$ that we want to align to the projection of $(u_{i,j}, v_{i,j})$ by tweaking $\mathbf{H}_i$ (i.e. find $\mathbf{H}_i^*$ such that $\mathbf{H}_i^* \tilde{\mathbf{w}}_j \equiv k [u_{i,j} \ v_{i,j} \ 1]^T$).

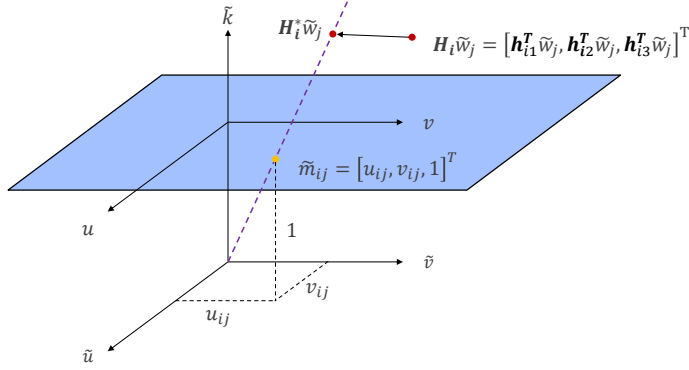

It can be shown that two vectors have the same direction if their cross product is $\bar{\mathbf{0}}$:

$$\begin{aligned} \tilde{\mathbf{m}}_{i,j} \equiv \mathbf{H}_i \tilde{\mathbf{w}}_j &\iff \tilde{\mathbf{m}}_{i,j} \times \mathbf{H}_i \tilde{\mathbf{w}}_j = \bar{\mathbf{0}} \iff \begin{bmatrix} u_{i,j} \\ v_{i,j} \\ 1 \end{bmatrix} \times \begin{bmatrix} \mathbf{h}_{i,1}^T \tilde{\mathbf{w}}_j \\ \mathbf{h}_{i,2}^T \tilde{\mathbf{w}}_j \\ \mathbf{h}_{i,3}^T \tilde{\mathbf{w}}_j \end{bmatrix} = \begin{bmatrix} 0 \\ 0 \\ 0 \end{bmatrix} \\ &\iff \begin{bmatrix} v_{i,j} \mathbf{h}_{i,3}^T \tilde{\mathbf{w}}_j - \mathbf{h}_{i,2}^T \tilde{\mathbf{w}}_j \\ \mathbf{h}_{i,1}^T \tilde{\mathbf{w}}_j - u_{i,j} \mathbf{h}_{i,3}^T \tilde{\mathbf{w}}_j \\ u_{i,j} \mathbf{h}_{i,2}^T \tilde{\mathbf{w}}_j - v_{i,j} \mathbf{h}_{i,1}^T \tilde{\mathbf{w}}_j \end{bmatrix} = \begin{bmatrix} 0 \\ 0 \\ 0 \end{bmatrix} \\ &\iff \begin{bmatrix} \bar{\mathbf{0}}_{1 \times 3} & -\tilde{\mathbf{w}}_j^T & v_{i,j} \tilde{\mathbf{w}}_j^T \\ \tilde{\mathbf{w}}_j^T & \bar{\mathbf{0}}_{1 \times 3} & -u_{i,j} \tilde{\mathbf{w}}_j^T \\ -v_{i,j} \tilde{\mathbf{w}}_j^T & u_{i,j} \tilde{\mathbf{w}}_j^T & \bar{\mathbf{0}}_{1 \times 3} \end{bmatrix} \begin{bmatrix} \mathbf{h}_{i,1} \\ \mathbf{h}_{i,2} \\ \mathbf{h}_{i,3} \end{bmatrix} = \begin{bmatrix} 0 \\ 0 \\ 0 \end{bmatrix} \quad \begin{array}{l} \mathbf{h}_*^T \tilde{\mathbf{w}}_j = \tilde{\mathbf{w}}_j^T \mathbf{h}_* \\ \text{and factorization} \end{array} \\ &\iff \begin{bmatrix} \bar{\mathbf{0}}_{1 \times 3} & -\tilde{\mathbf{w}}_j^T & v_{i,j} \tilde{\mathbf{w}}_j^T \\ \tilde{\mathbf{w}}_j^T & \bar{\mathbf{0}}_{1 \times 3} & -u_{i,j} \tilde{\mathbf{w}}_j^T \end{bmatrix} \begin{bmatrix} \mathbf{h}_{i,1} \\ \mathbf{h}_{i,2} \\ \mathbf{h}_{i,3} \end{bmatrix} = \begin{bmatrix} 0 \\ 0 \end{bmatrix} \quad \begin{array}{l} \text{only the first two} \\ \text{equations are} \\ \text{linearly independent} \end{array} \end{aligned}$$

Given c corners, a homogeneous overdetermined linear system of $2c$ equations to estimate the (vectorized) homography $\mathbf{h}_i$ is defined as follows:

$$\begin{bmatrix} \bar{\mathbf{0}}_{1 \times 3} & -\tilde{\mathbf{w}}_1^T & v_{i,1} \tilde{\mathbf{w}}_1^T \\ \tilde{\mathbf{w}}_1^T & \bar{\mathbf{0}}_{1 \times 3} & -u_{i,1} \tilde{\mathbf{w}}_1^T \\ \vdots & \vdots & \vdots \\ \bar{\mathbf{0}}_{1 \times 3} & -\tilde{\mathbf{w}}_c^T & v_{i,c} \tilde{\mathbf{w}}_c^T \\ \tilde{\mathbf{w}}_c^T & \bar{\mathbf{0}}_{1 \times 3} & -u_{i,c} \tilde{\mathbf{w}}_c^T \end{bmatrix} \begin{bmatrix} \mathbf{h}_{i,1} \\ \mathbf{h}_{i,2} \\ \mathbf{h}_{i,3} \end{bmatrix}_{\mathbb{R}^{9 \times 1}} = \bar{\mathbf{0}}_{2c \times 1} \Rightarrow \mathbf{L}_i \mathbf{h}_i = \bar{\mathbf{0}}$$

$\mathbb{R}^{2c \times 9}$

With the constraint $\|\mathbf{h}_i\| = 1$ to avoid the trivial solution $\mathbf{h}_i = \bar{\mathbf{0}}$.


The solution $\mathbf{h}_i^*$ is found by minimizing the norm of $\mathbf{L}_i \mathbf{h}_i$:

$$\mathbf{h}_i^* = \arg \min_{\mathbf{h}_i \in \mathbb{R}^9} \|\mathbf{L}_i \mathbf{h}_i\| \text{ subject to } \|\mathbf{h}_i\| = 1$$

$\mathbf{h}_i^*$ can be found using the singular value decomposition of $\mathbf{L}_i = \mathbf{U}_i \mathbf{D}_i \mathbf{V}_i^T$. It can be shown that $\mathbf{h}_i^* = \mathbf{v}_9$ where $\mathbf{v}_9$ is the last column of $\mathbf{V}_i$, associated with the smallest singular value.

Remark. This step minimizes an algebraic error.

Homographies non-linear refinement The homographies $\mathbf{H}_i$ estimated at the previous step are obtained using a linear method and need to be refined as, for each image i , the IRF coordinates $\mathbf{H}_i \mathbf{w}_j = (\frac{h_{i,1}^T \tilde{\mathbf{w}}_j}{h_{i,3}^T \tilde{\mathbf{w}}_j}, \frac{h_{i,2}^T \tilde{\mathbf{w}}_j}{h_{i,3}^T \tilde{\mathbf{w}}_j})$ of the world point $\mathbf{w}_j$ are still not matching the known IRF coordinates $\mathbf{m}_{i,j}$ of the j -corner in the i -image.

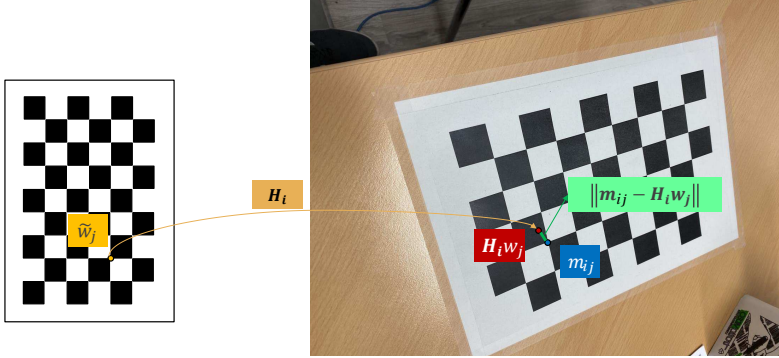

Given an initial guess for the homography $\mathbf{H}_i$, we can refine it through a non-linear minimization problem:

$$\mathbf{H}_i^* = \arg \min_{\mathbf{H}_i} \sum_{j=1}^c \|\mathbf{m}_{i,j} - \mathbf{H}_i \mathbf{w}_j\|^2$$

This can be solved using an iterative algorithm (e.g. Levenberg-Marquardt algorithm).

Remark. This step minimizes a geometric error.

Initial intrinsic parameters guess From the PPM, the following relationship between intrinsic and extrinsic parameters can be established:

$$\begin{aligned} P_i &\equiv A[R_i | \mathbf{t}_i] = A \begin{bmatrix} \mathbf{r}_{i,1} & \mathbf{r}_{i,2} & \mathbf{r}_{i,3} & \mathbf{t}_i \end{bmatrix} \\ \Rightarrow H_i &= \begin{bmatrix} \mathbf{h}_{i,1} & \mathbf{h}_{i,2} & \mathbf{h}_{i,3} \end{bmatrix} = \begin{bmatrix} kA\mathbf{r}_{i,1} & kA\mathbf{r}_{i,2} & kA\mathbf{t}_i \end{bmatrix} \quad \text{By definition of } H_i \\ \Rightarrow &(k\mathbf{r}_{i,1} = A^{-1}\mathbf{h}_{i,1}) \wedge (k\mathbf{r}_{i,2} = A^{-1}\mathbf{h}_{i,2}) \end{aligned}$$

Moreover, as R_i is an orthogonal matrix, the following two constraints must hold:

$$\begin{aligned} \langle \mathbf{r}_{i,1}, \mathbf{r}_{i,2} \rangle &= \bar{\mathbf{0}} \Rightarrow \langle A^{-1}\mathbf{h}_{i,1}, A^{-1}\mathbf{h}_{i,2} \rangle = \bar{\mathbf{0}} \\ &\Rightarrow \mathbf{h}_{i,1}^T (A^{-1})^T A^{-1} \mathbf{h}_{i,2} = \bar{\mathbf{0}} \end{aligned}$$

$$\begin{aligned} \langle \mathbf{r}_{i,1}, \mathbf{r}_{i,1} \rangle &= \langle \mathbf{r}_{i,2}, \mathbf{r}_{i,2} \rangle \Rightarrow \langle A^{-1}\mathbf{h}_{i,1}, A^{-1}\mathbf{h}_{i,1} \rangle = \langle A^{-1}\mathbf{h}_{i,2}, A^{-1}\mathbf{h}_{i,2} \rangle \\ &\Rightarrow \mathbf{h}_{i,1}^T (A^{-1})^T A^{-1} \mathbf{h}_{i,1} = \mathbf{h}_{i,2}^T (A^{-1})^T A^{-1} \mathbf{h}_{i,2} \end{aligned}$$

where $\langle \cdot, \cdot \rangle$ is the dot product.

If at least 3 images have been collected, by stacking the two constraints for each image, we obtain a homogeneous system of equations that can be solved with SVD over the unknown $(A^{-1})^T A^{-1}$.

Note that $(A^{-1})^T A^{-1}$ is symmetric, therefore reducing the number of independent parameters to 5 (6 with skew).

Once $(A^{-1})^T A^{-1}$ has been estimated, the actual values of A can be found by solving a traditional system of equations using the structure and results in $(A^{-1})^T A^{-1}$.

Remark. This step minimizes an algebraic error.

Initial extrinsic parameters guess For each image, given the estimated intrinsic matrix A and the homography H_i , it holds that:

$$\begin{aligned} H_i &= \begin{bmatrix} \mathbf{h}_{i,1} & \mathbf{h}_{i,2} & \mathbf{h}_{i,3} \end{bmatrix} = \begin{bmatrix} kA\mathbf{r}_{i,1} & kA\mathbf{r}_{i,2} & kA\mathbf{t}_i \end{bmatrix} \\ \Rightarrow \mathbf{r}_{i,1} &= \frac{A^{-1}\mathbf{h}_{i,1}}{k} \end{aligned}$$

Then, as $\mathbf{r}_{i,1}$ is a unit vector, it must be that $k = \|A^{-1}\mathbf{h}_{i,1}\|$.

Now, with k estimated, $\mathbf{r}_{i,2}$ and $\mathbf{t}_i$ can be computed:

$$\mathbf{r}_{i,2} = \frac{A^{-1}\mathbf{h}_{i,2}}{k} \quad \mathbf{t}_i = \frac{A^{-1}\mathbf{h}_{i,3}}{k}$$

Finally, $\mathbf{r}_{i,3}$ can be computed as:

$$\mathbf{r}_{i,3} = \mathbf{r}_{i,1} \times \mathbf{r}_{i,2}$$

where $\times$ is the cross-product. It holds that:

- $\mathbf{r}_{i,3}$ is orthogonal to $\mathbf{r}_{i,1}$ and $\mathbf{r}_{i,2}$.
- $\|\mathbf{r}_{i,3}\| = 1$ as the cross-product computes the area of the square defined by $\mathbf{r}_{i,1}$ and $\mathbf{r}_{i,2}$ (both unit vectors).

Note that the resulting rotation matrix R_i is not exactly orthogonal as:

- $\mathbf{r}_{i,1}$ and $\mathbf{r}_{i,2}$ are not necessarily orthogonal.

- $\mathbf{r}_{i,2}$ does not necessarily have unit length as k was computed considering $\mathbf{r}_{i,1}$.

SVD for $\mathbf{R}_i$ can be used to find the closest orthogonal matrix by substituting the singular value matrix $\mathbf{D}$ with the identity $\mathbf{I}$.

Remark. This step minimizes an algebraic error.

Initial distortion parameters guess The current estimate of the homographies $\mathbf{H}_i$ project WRF points into ideal (undistorted) IRF coordinates $\mathbf{m}_{\text{undist}}$. On the other hand, the coordinates $\mathbf{m}$ of the corners in the actual image are distorted.

The original algorithm estimates the parameters of the radial distortion function defined as:

$$\begin{bmatrix} x \\ y \end{bmatrix} = L(r) \begin{bmatrix} x_{\text{undist}} \\ y_{\text{undist}} \end{bmatrix} = (1 + k_1 r^2 + k_2 r^4) \begin{bmatrix} x_{\text{undist}} \\ y_{\text{undist}} \end{bmatrix}$$

where k_1 and k_2 are parameters.

Remark. OpenCV uses a different method to estimate:

- 3 parameters k_1, k_2, k_3 for radial distortion.
- 2 parameters p_1, p_2 for tangential distortion.

Using the estimated intrinsic matrix $\mathbf{A}$, it is possible to obtain the CRF coordinates (x, y) from the IRF coordinates (u, v) of $\mathbf{m}$ or $\mathbf{m}_{\text{undist}}$:

$$\begin{bmatrix} ku \\ kv \\ k \end{bmatrix} \equiv \mathbf{A} \begin{bmatrix} x \\ y \\ 1 \end{bmatrix} \Rightarrow \begin{bmatrix} ku \\ kv \\ k \end{bmatrix} \equiv \begin{bmatrix} f_u x + u_0 \\ f_v y + v_0 \\ 1 \end{bmatrix} \Rightarrow \begin{bmatrix} x \\ y \end{bmatrix} = \begin{bmatrix} \frac{u-u_0}{f_u} \\ \frac{v-v_0}{f_v} \end{bmatrix}$$

Then, the distortion equation can be rewritten in IRF coordinates as:

$$\begin{aligned} \begin{bmatrix} \frac{u-u_0}{f_u} \\ \frac{v-v_0}{f_v} \end{bmatrix} &= (1 + k_1 r^2 + k_2 r^4) \begin{bmatrix} \frac{u_{\text{undist}}-u_0}{f_u} \\ \frac{v_{\text{undist}}-v_0}{f_v} \end{bmatrix} \\ \Rightarrow \begin{bmatrix} u - u_0 \\ v - v_0 \end{bmatrix} &= (1 + k_1 r^2 + k_2 r^4) \begin{bmatrix} u_{\text{undist}} - u_0 \\ v_{\text{undist}} - v_0 \end{bmatrix} \\ \Rightarrow \begin{bmatrix} u - u_0 \\ v - v_0 \end{bmatrix} - \begin{bmatrix} u_{\text{undist}} - u_0 \\ v_{\text{undist}} - v_0 \end{bmatrix} &= (k_1 r^2 + k_2 r^4) \begin{bmatrix} u_{\text{undist}} - u_0 \\ v_{\text{undist}} - v_0 \end{bmatrix} \\ \Rightarrow \begin{bmatrix} u - u_{\text{undist}} \\ v - v_{\text{undist}} \end{bmatrix} &= \begin{bmatrix} (u_{\text{undist}} - u_0)r^2 & (u_{\text{undist}} - u_0)r^4 \\ (v_{\text{undist}} - v_0)r^2 & (v_{\text{undist}} - v_0)r^4 \end{bmatrix} \begin{bmatrix} k_1 \\ k_2 \end{bmatrix} \end{aligned}$$

With n images with c corners each, we obtain $2nc$ equations to form a system $\mathbf{d} = \mathbf{D}\mathbf{k}$ in 2 unknowns $\mathbf{k} = [k_1 \ k_2]^T$. This can be solved in a least squares approach as:

$$\mathbf{k}^* = \min_k \|\mathbf{D}\mathbf{k} - \mathbf{d}\|_2 = \mathbf{D}^\dagger \mathbf{d} = (\mathbf{D}^T \mathbf{D})^{-1} \mathbf{D}^T \mathbf{d}$$

where $\mathbf{D}^\dagger$ is the pseudo-inverse of $\mathbf{D}$.

Remark. This step minimizes an algebraic error.

Parameters non-linear refinement A final non-linear refinement of all the estimated parameters is done to obtain a solution closer to their physical meaning.

Assuming i.i.d. noise, this is done through the maximum likelihood estimate (MLE) using the estimated parameters as starting point:

$$\mathbf{A}^*, \mathbf{k}^*, \mathbf{R}_i^*, \mathbf{t}_i^* = \arg \min_{\mathbf{A}, \mathbf{k}, \mathbf{R}_i, \mathbf{t}_i} \sum_{i=1}^n \sum_{j=1}^c \|\tilde{\mathbf{m}}_{i,j} - \hat{\mathbf{m}}(\mathbf{A}, \mathbf{k}, \mathbf{R}_i, \mathbf{t}_i, \tilde{\mathbf{w}}_j)\|^2$$

where $\tilde{\mathbf{m}}_{i,j}$ are the known IRF coordinates in projective space of the j -th corner in the i -th image and $\hat{\mathbf{m}}(\cdot)$ is the projection from WRF to IRF coordinates using the estimated parameters.

This can be solved using iterative algorithms.

Remark. This step minimizes a geometric error.

1.5 Warping

Warp Transformation of an image on the spatial domain.

Warp

Given an image I , warping can be seen as a function w that computes the new coordinates of each pixel:

$$u' = w_u(u, v) \quad v' = w_v(u, v)$$

The transformation can be:

Rotation
$$\begin{bmatrix} u' \\ v' \end{bmatrix} = \begin{bmatrix} \cos \theta & -\sin \theta \\ \sin \theta & \cos \theta \end{bmatrix} \begin{bmatrix} u \\ v \end{bmatrix}$$

Full homography
$$k \begin{bmatrix} u' \\ v' \\ 1 \end{bmatrix} = \begin{bmatrix} h_{1,1} & h_{1,2} & h_{1,3} \\ h_{2,1} & h_{2,2} & h_{2,3} \\ h_{3,1} & h_{3,2} & h_{3,3} \end{bmatrix} \begin{bmatrix} u \\ v \\ 1 \end{bmatrix}$$

Remark. Differently from warping, filtering transforms the pixel intensities of an image.

1.5.1 Forward mapping

Starting from the input image coordinates, apply the warping function to obtain the output image.

Forward mapping

Output coordinates might be continuous and need to be discretized (e.g. truncated or rounded). This might give rise to two problems:

Fold More than one input pixel ends up in the same output pixel.

Hole An output pixel does not have a corresponding input pixel.

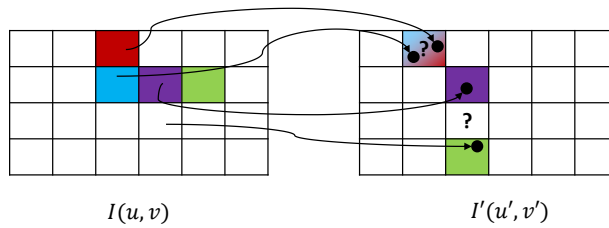



Figure 1.8: Example of fold and hole

1.5.2 Backward mapping

Starting from the output image coordinates, use the inverse of the warping function w^{-1} to find its corresponding input coordinates.

Backward mapping

$$u = w_u^{-1}(u', v') \quad v = w_v^{-1}(u', v')$$

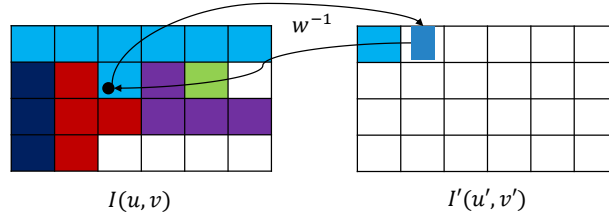

The computed input coordinates might be continuous. Possible discretization strategies are:


- Truncation.
- Nearest neighbor.
- Interpolation between the 4 closest pixels of the continuous point (e.g. bilinear, bicubic, ...).

Bilinear interpolation Given a continuous coordinate (u, v) and its closest four pixels $(u_1, v_1), \dots, (u_4, v_4)$ with intensities denoted for simplicity as $I_i = I(u_i, v_i)$, bilinear interpolation works as follows:

Bilinear interpolation

1. Compute the offset of (u, v) w.r.t. the top-left pixel:

$$\Delta u = u - u_1 \quad \Delta v = v - v_1$$



2. Interpolate a point (u_a, v_a) between (u_1, v_1) and (u_2, v_2) in such a way that it is perpendicular to (u, v) . Do the same for a point (u_b, v_b) between (u_3, v_3) and (u_4, v_4) . The intensities of the new points are computed by interpolating the intensities of their extrema:

$$I_a = I_1 + (I_2 - I_1)\Delta u \quad I_b = I_3 + (I_4 - I_3)\Delta u$$


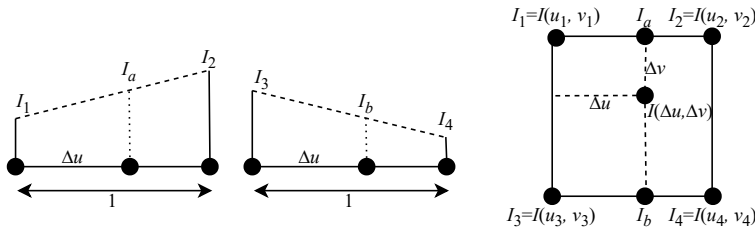


Figure 1.9: In the figure, it is assumed that $I_1 < I_2$ and $I_3 > I_4$

3. The intensity $I(\Delta u, \Delta v) = I'(u', v')$ in the warped image is obtained by interpolating the intensities of I_a and I_b :

$$\begin{aligned} I'(u', v') &= I_a + (I_b - I_a)\Delta v \\ &= \left(I_1 + (I_2 - I_1)\Delta u \right) + \left((I_3 + (I_4 - I_3)\Delta u) - (I_1 + (I_2 - I_1)\Delta u) \right) \Delta v \\ &= (1 - \Delta u)(1 - \Delta v)I_1 + \Delta u(1 - \Delta v)I_2 + (1 - \Delta u)\Delta v I_3 + \Delta u\Delta v I_4 \end{aligned}$$

Remark (Zoom). Zooming using nearest-neighbor produces sharper edges while bilinear interpolation results in smoother images.

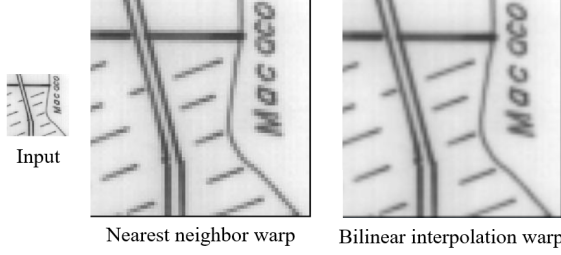

Remark. Nearest-neighbor is suited to preserve transition (e.g. zoom a binary mask while maintaining the 0s and 1s).

1.5.3 Undistort warping


Once a camera has been calibrated, the lens distortion parameters can be used to obtain the undistorted image through backward warping.

$$\begin{aligned} w_u &= u_{\text{undist}} + (k_1 r^2 + k_2 r^4)(u_{\text{undist}} - u_0) \\ w_v &= v_{\text{undist}} + (k_1 r^2 + k_2 r^4)(v_{\text{undist}} - v_0) \end{aligned}$$

$$I'(u_{\text{undist}}, v_{\text{undist}}) = I(w_u^{-1}(u_{\text{undist}}, v_{\text{undist}}), w_v^{-1}(u_{\text{undist}}, v_{\text{undist}}))$$

Undistorted images enjoy some properties:

Planar warping Any two images without lens distortion of a planar world scene ($z_W = 0$) are related by a homography. Planar warping

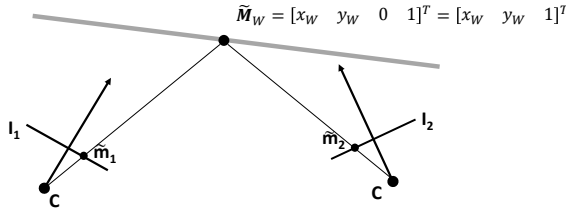

Given two images containing the same world point, their image points (in projective space) are respectively given by a homography $\mathbf{H}_1$ and $\mathbf{H}_2$ (note that with $z_w = 0$, the PPM is a 3×3 matrix and therefore a homography):

$$\begin{aligned} \tilde{\mathbf{m}}_1 &= \mathbf{H}_1 \tilde{\mathbf{M}}_W & \tilde{\mathbf{m}}_2 &= \mathbf{H}_2 \tilde{\mathbf{M}}_W \\ \tilde{\mathbf{m}}_1 &= \mathbf{H}_1 \mathbf{H}_2^{-1} \tilde{\mathbf{m}}_2 & \tilde{\mathbf{m}}_2 &= \mathbf{H}_2 \mathbf{H}_1^{-1} \tilde{\mathbf{m}}_1 \end{aligned}$$

Then, $\mathbf{H}_1 \mathbf{H}_2^{-1} = \mathbf{H}_{21} = \mathbf{H}_{12}^{-1}$ is the homography that relates $\tilde{\mathbf{m}}_2$ to $\tilde{\mathbf{m}}_1$ and $\mathbf{H}_2 \mathbf{H}_1^{-1} = \mathbf{H}_{12} = \mathbf{H}_{21}^{-1}$ relates $\tilde{\mathbf{m}}_1$ to $\tilde{\mathbf{m}}_2$.

Remark. Only ground points on the planar section of the image can be correctly warped.

Example (Inverse Perspective Mapping). In autonomous driving, it is usually useful to have a bird-eye view of the road.


In a controlled environment, a calibrated camera can be mounted on a car to take a picture of the road in front of it. Then, a (virtual) image of the road viewed from above is generated. By finding the homography that relates the two images, it is possible to produce a bird-eye view of the road from the camera mounted on the vehicle.

Note that the homography needs to be computed only once.



Rotation warping Any two images without lens distortion taken by rotating the camera about its optical center are related by a homography.

Rotation warping

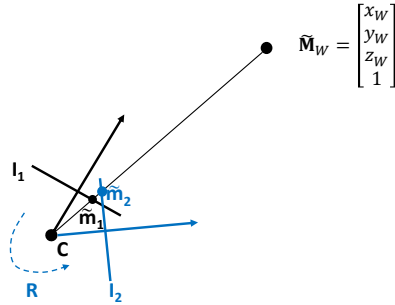


It is assumed that the first image is taken in such a way that the WRF and CRF are the same (i.e. no extrinsic parameters). Then, a second image is taken by rotating the camera about its optical center. It holds that:

$$\begin{aligned}\tilde{\mathbf{m}}_1 &= \mathbf{A}[\mathbf{I}|\bar{\mathbf{0}}]\tilde{\mathbf{M}}_W = \mathbf{A}\tilde{\mathbf{M}}_W & \tilde{\mathbf{m}}_2 &= \mathbf{A}[\mathbf{R}|\bar{\mathbf{0}}]\tilde{\mathbf{M}}_W = \mathbf{A}\mathbf{R}\tilde{\mathbf{M}}_W \\ \tilde{\mathbf{m}}_1 &= \mathbf{A}\mathbf{R}^{-1}\mathbf{A}^{-1}\tilde{\mathbf{m}}_2 & \tilde{\mathbf{m}}_2 &= \mathbf{A}\mathbf{R}\mathbf{A}^{-1}\tilde{\mathbf{m}}_1\end{aligned}$$

Then, $\mathbf{A}\mathbf{R}^{-1}\mathbf{A}^{-1} = \mathbf{H}_{21} = \mathbf{H}_{12}^{-1}$ is the homography that relates $\tilde{\mathbf{m}}_2$ to $\tilde{\mathbf{m}}_1$ and $\mathbf{A}\mathbf{R}\mathbf{A}^{-1} = \mathbf{H}_{12} = \mathbf{H}_{21}^{-1}$ relates $\tilde{\mathbf{m}}_1$ to $\tilde{\mathbf{m}}_2$.

Remark. Any point of the image can be correctly warped.

Example (Compensate pitch or yaw). In autonomous driving, cameras should be ideally mounted with the optical axis parallel to the road plane and aligned with the direction of motion. It is usually very difficult to obtain perfect alignment physically but a calibrated camera can help to compensate pitch (i.e. rotation around the x -axis) and yaw (i.e. rotation around the y -axis) by estimating the vanishing point of the lane lines.

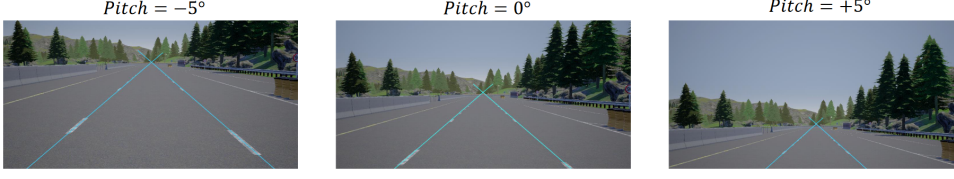

It is assumed that the vehicle is driving straight w.r.t. the lines and that the WRF is attached to the vehicle in such a way that the z -axis is pointing in front of the vehicle. It holds that any line parallel to the z -axis has direction $[0 \ 0 \ 1]^T$ and their point at infinity in perspective space is at $[0 \ 0 \ 1 \ 0]^T$.

The coordinates of the vanishing point are then obtained as:

$$\mathbf{m}_\infty \equiv \mathbf{A}[\mathbf{R}|0] \begin{bmatrix} 0 \\ 0 \\ 1 \\ 0 \end{bmatrix} \equiv \mathbf{A}\mathbf{r}_3 \equiv \mathbf{A} \begin{bmatrix} 0 \\ \sin \beta \\ \cos \beta \end{bmatrix}$$

where $\mathbf{r}_3$ is the third column of the rotation matrix $\mathbf{R}_{\text{pitch}} = \begin{bmatrix} 1 & 0 & 0 \\ 0 & \cos \beta & \sin \beta \\ 0 & -\sin \beta & \cos \beta \end{bmatrix}$ that applies a rotation of β degree around the x -axis.

By computing the point at infinity, it is possible to estimate $\mathbf{r}_3 = \frac{\mathbf{A}^{-1}\mathbf{m}_\infty}{\|\mathbf{A}^{-1}\mathbf{m}_\infty\|_2}$ (as $\mathbf{r}_3$ is a unit vector) and from it we can find the entire rotation matrix $\mathbf{R}_{\text{pitch}}$.

Finally, the homography $\mathbf{A}\mathbf{R}_{\text{pitch}}\mathbf{A}^{-1}$ relates the pitched image to the ideal image.

Remark. The same procedure can be done for the yaw.

2 Image classification

2.1 Supervised datasets

Dataset Given a set of labeled data, it can be split into:

Dataset

Train set $D^{\text{train}} = \{(\mathbf{x}_{\text{train}}^{(i)}, y_{\text{train}}^{(i)}) \mid i = 1, \dots, N\}$.

Test set $D^{\text{test}} = \{(\mathbf{x}_{\text{test}}^{(i)}, y_{\text{test}}^{(i)}) \mid i = 1, \dots, M\}$.

It is assumed that the two sets contain i.i.d. samples drawn from the same unknown distribution.

2.1.1 Modified NIST (MNIST)



Content Handwritten digits from 0 to 9.


Number of classes 10.

Train set size 50k.

Test set size 10k.

Image format 28×28 grayscale.

2.1.2 CIFAR10

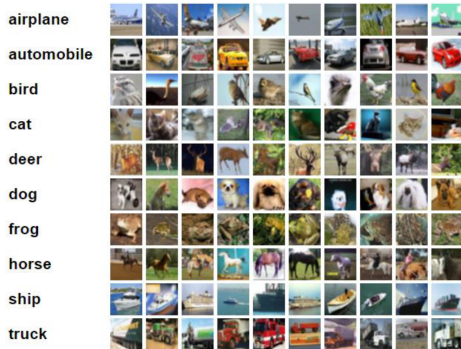

Content Objects of various categories.


Number of classes 10.

Train set size 50k.

Test set size 10k.

Image size 32×32 RGB.

2.1.3 CIFAR100

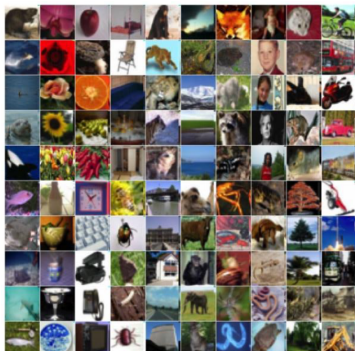

Content Objects of various categories.

Number of classes 100 (20 super-classed with 5 sub-classes).

Train set size 50k.

Test set size 10k.

Image size 32×32 RGB.


2.1.4 ImageNet 21k

Content Objects of various categories.


Number of classes 21k synsets from WordNet organized hierarchically.

Dataset size 14 millions.

Image size Variable resolution RGB. Average size of 400×350 .

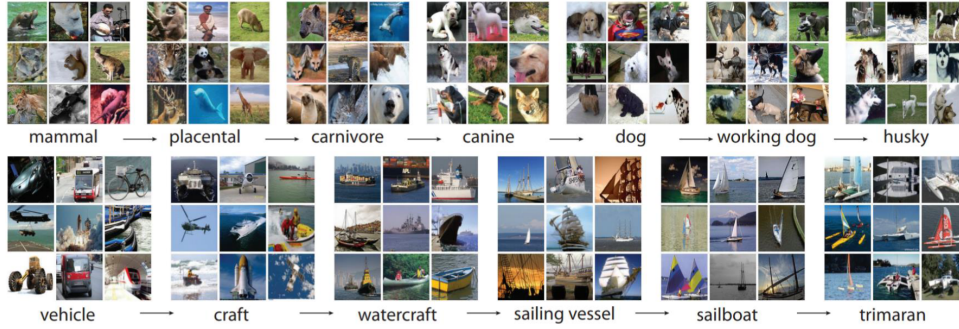

2.1.5 ImageNet 1k

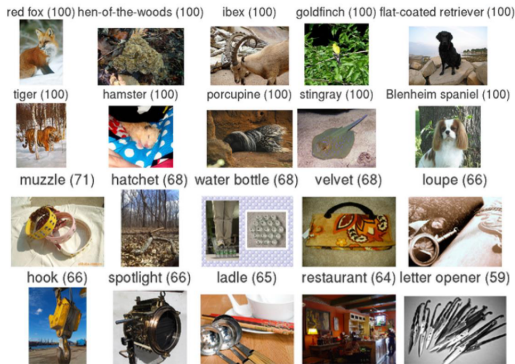

Content Objects of various categories.

Number of classes 1000.

Train set size 1.3 millions.

Validation set size 50k.

Test set size 100k.

Image size Variable resolution RGB. Often resized to 256×256 .

Remark. Performance is usually measured as top-5 accuracy as making a single prediction might be ambiguous due to the fact that the images can contain multiple objects.

2.2 Learning

Learning problem Find the best model h^* from the hypothesis space $\mathbb{H}$ that minimizes a loss function $\mathcal{L}$: Learning problem

$$h^* = \arg \min_{h \in \mathbb{H}} \mathcal{L}(h, D^{\text{train}})$$

In machine learning, models are usually parametrized. The problem then becomes to find the best set of parameters θ^* from the parameter space Θ :

$$\theta^* = \arg \min_{\theta \in \Theta} \mathcal{L}(\theta, D^{\text{train}})$$

2.2.1 Loss function

Loss function Easy to optimize function that acts as a proxy to measure the goodness of a model. Loss function

The loss computed on a dataset is usually obtained as the average of the values of the single samples:

$$\mathcal{L}(\theta, D^{\text{train}}) = \frac{1}{N} \sum_i^{|D^{\text{train}}|} \mathcal{L}(\theta, (\mathbf{x}^{(i)}, y^{(i)}))$$

0-1 loss Loss computed as the number of misclassifications: 0-1 loss

$$\mathcal{L}(\theta, (\mathbf{x}^{(i)}, y^{(i)})) = |\text{misclassifications}|$$

This loss is not ideal as it is insensitive to small (or even large) changes in the parameters. Moreover, it does not tell in which direction should the parameters be modified to reduce the loss.

Remark. This loss can be minimized using a combinatorial optimization approach but it does not scale well with large datasets.




Figure 2.1: Example of linear classifier for spam detection. Small changes on the boundary line do not change the 0-1 loss. The loss itself does not tell which is the best direction to move the line.

Root mean square error Loss computed as the direct comparison between the prediction and target label: Root mean square error

$$\mathcal{L}(\theta, (\mathbf{x}^{(i)}, y^{(i)})) = \|f(\mathbf{x}^{(i)}; \theta) - y^{(i)}\|_2$$

Note that $y^{(i)}$ might be encoded (e.g. one-hot).

Cross-entropy loss Transform the logits of a model into a probability distribution and estimate the parameters through MLE. Cross-entropy loss

Softmax Function that converts its input into a probability distribution. Given the logits $\mathbf{s} \in \mathbb{R}^c$, the score $\mathbf{s}_j$ of class j is converted into a probability as follows: Softmax

$$\mathcal{P}_{\text{model}}(Y = j | X = \mathbf{x}^{(i)}; \theta) = \text{softmax}_j(\mathbf{s}) = \frac{\exp(\mathbf{s}_j)}{\sum_{k=1}^c \exp(\mathbf{s}_k)}$$

For numerical stability, **softmax** is usually computed as:

$$\begin{aligned} \text{softmax}_j(\mathbf{s} - \max\{\mathbf{s}\}) &= \frac{\exp(\mathbf{s}_j - \max\{\mathbf{s}\})}{\sum_{k=1}^c \exp(\mathbf{s}_k - \max\{\mathbf{s}\})} \\ &= \frac{\exp(-\max\{\mathbf{s}\}) \exp(\mathbf{s}_j)}{\exp(-\max\{\mathbf{s}\}) \sum_{k=1}^c \exp(\mathbf{s}_k)} = \text{softmax}_j(\mathbf{s}) \end{aligned}$$

Maximum likelihood estimation Use MLE to estimate the parameters on the probability distribution outputted by the `softmax` function: Cross-entropy loss

$$\begin{aligned}
\boldsymbol{\theta}^* &= \arg \max_{\boldsymbol{\theta}} \mathcal{P}_{\text{model}}(y^{(1)}, \dots, y^{(N)} | \mathbf{x}^{(1)}, \dots, \mathbf{x}^{(N)}; \boldsymbol{\theta}) \\
&= \arg \max_{\boldsymbol{\theta}} \prod_{i=1}^N \mathcal{P}_{\text{model}}(Y = y^{(i)} | X = \mathbf{x}^{(i)}; \boldsymbol{\theta}) \\
&= \arg \max_{\boldsymbol{\theta}} \sum_{i=1}^N \log \mathcal{P}_{\text{model}}(Y = y^{(i)} | X = \mathbf{x}^{(i)}; \boldsymbol{\theta}) \\
&= \arg \min_{\boldsymbol{\theta}} \sum_{i=1}^N -\log \mathcal{P}_{\text{model}}(Y = y^{(i)} | X = \mathbf{x}^{(i)}; \boldsymbol{\theta}) \\
&= \arg \min_{\boldsymbol{\theta}} \sum_{i=1}^N -\log \left(\frac{\exp(\mathbf{s}_{y^{(i)}})}{\sum_{k=1}^c \exp(\mathbf{s}_k)} \right) \\
&= \arg \min_{\boldsymbol{\theta}} \sum_{i=1}^N -\log \left(\exp(\mathbf{s}_{y^{(i)}}) \right) + \log \left(\sum_{k=1}^c \exp(\mathbf{s}_k) \right) \\
&= \arg \min_{\boldsymbol{\theta}} \sum_{i=1}^N -\mathbf{s}_{y^{(i)}} + \log \left(\sum_{k=1}^c \exp(\mathbf{s}_k) \right)
\end{aligned}$$

The second term ($\log(\sum_{k=1}^c \exp(\mathbf{s}_k))$) is called `logsumexp` and approximates the max function. Therefore, the loss can be seen as:

$$\mathcal{L}(\boldsymbol{\theta}, (\mathbf{x}^{(i)}, y^{(i)})) = -\mathbf{s}_{y^{(i)}} + \log \left(\sum_{k=1}^c \exp(\mathbf{s}_k) \right) \approx -\mathbf{s}_{y^{(i)}} + \max\{\mathbf{s}\}$$

2.2.2 Gradient descent

Gradient descent An epoch e of gradient descent does the following: Gradient descent

1. Classify all training data to obtain the predictions $\hat{y}^{(i)} = f(\mathbf{x}^{(i)}; \boldsymbol{\theta}^{(e-1)})$ and the loss $\mathcal{L}(\boldsymbol{\theta}^{(e-1)}, \mathbf{D}^{\text{train}})$.
2. Compute the gradient $\nabla \mathcal{L} = \frac{\partial \mathcal{L}}{\partial \boldsymbol{\theta}}(\boldsymbol{\theta}^{(e-1)}, \mathbf{D}^{\text{train}})$.
3. Update the parameters $\boldsymbol{\theta}^{(e)} = \boldsymbol{\theta}^{(e-1)} - \text{lr} \cdot \nabla \mathcal{L}$.

Stochastic gradient descent Reduce the computational cost of gradient descent by computing the gradient of a single sample. An epoch e of SGD does the following: Stochastic gradient descent

1. Shuffle the training data $\mathbf{D}^{\text{train}}$.
2. For $i = 0, \dots, N - 1$:
 - a) Classify $\mathbf{x}^{(i)}$ to obtain the prediction $\hat{y}^{(i)} = f(\mathbf{x}^{(i)}; \boldsymbol{\theta}^{(e*N+i)})$ and the loss $\mathcal{L}(\boldsymbol{\theta}^{(e*N+i)}, (\mathbf{x}^{(i)}, y^{(i)}))$.
 - b) Compute the gradient $\nabla \mathcal{L} = \frac{\partial \mathcal{L}}{\partial \boldsymbol{\theta}}(\boldsymbol{\theta}^{(e*N+i)}, (\mathbf{x}^{(i)}, y^{(i)}))$.
 - c) Update the parameters $\boldsymbol{\theta}^{(e*N+i+1)} = \boldsymbol{\theta}^{(e*N+i)} - \text{lr} \cdot \nabla \mathcal{L}$.

SGD with mini-batches Increase the update accuracy of SGD by using a mini-batch. An epoch e of SGD with mini-batches of size B does the following: SGD with mini-batches

1. Shuffle the training data $\mathbf{D}^{\text{train}}$.
2. For $u = 0, \dots, U$, with $U = \lceil \frac{N}{B} \rceil$:
 - a) Classify the examples $\mathbf{X}^{(u)} = \{\mathbf{x}^{(Bu)}, \dots, \mathbf{x}^{(B(u+1)-1)}\}$ to obtain the predictions $\hat{Y}^{(u)} = f(\mathbf{X}^{(u)}; \boldsymbol{\theta}^{(e*U+u)})$ and the loss $\mathcal{L}(\boldsymbol{\theta}^{(e*U+u)}, (\mathbf{X}^{(u)}, \hat{Y}^{(u)}))$.
 - b) Compute the gradient $\nabla \mathcal{L} = \frac{\partial \mathcal{L}}{\partial \boldsymbol{\theta}}(\boldsymbol{\theta}^{(e*U+u)}, (\mathbf{X}^{(u)}, \hat{Y}^{(u)}))$.
 - c) Update the parameters $\boldsymbol{\theta}^{(e*U+u+1)} = \boldsymbol{\theta}^{(e*U+u)} - \text{lr} \cdot \nabla \mathcal{L}$.

The following properties generally hold:

- Larger batches provide a smoother estimation of the gradient and allow to better exploit parallel hardware (below a certain limit, there is no gain in time).
- Smaller batches require more iterations to train but might have a regularization effect for better generalization.

Gradient computation Gradients can be computed:

Numerically Slow and approximate but easy to implement.

Analytically Using the chain rule.

Automatically Using automatic differentiation (e.g. backpropagation).

Gradient
computation

2.3 Linear classifier

Determine the class by computing a linear combination of the input.

Given c classes and a flattened image $\mathbf{x} \in \mathbb{R}^i$, a linear classifier f parametrized on $\mathbf{W} \in \mathbb{R}^{c \times i}$ is defined as:

$$f(\mathbf{x}; \mathbf{W}) = \mathbf{W}\mathbf{x} = \text{logits}$$

where the **logits** $\in \mathbb{R}^c$ vector contains a score for each class.

The prediction is obtained as the index of the maximum score.

Remark. Predicting directly the integer encoded classes is not ideal as it would give a (probably) inexistent semantic ordering (e.g. if 2 encodes bird and 3 encodes cat, 2.5 should not mean half bird and half cat).

Remark. Linear classifiers can be seen as a template-matching method. Each row of $\mathbf{W} \in \mathbb{R}^{c \times i}$ is a class template that is cross-correlated with the image to obtain a score.

Remark. In practice, a linear classifier is actually an affine classifier parametrized on $\theta = (\mathbf{W} \in \mathbb{R}^{c \times i}, \mathbf{b} \in \mathbb{R}^c)$:

$$f(\mathbf{x}; \theta) = \mathbf{W}\mathbf{x} + \mathbf{b} = \text{logits}$$

Remark. Linear classifiers are limited by the expressiveness of the input data as pixels alone do not contain relevant features.

Affine classifier


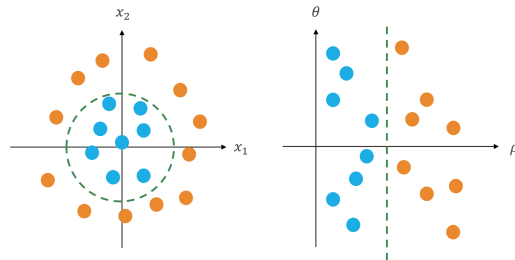


Figure 2.2: Example of non-linearly separable data points that become linearly separable in polar coordinates

2.4 Bag of visual words

Codeword Visual feature (e.g. an edge with a particular direction) that appears in an image. Codeword

Bag of visual words (BOVW) Encoding of an image into a histogram of codeword frequencies. Bag of visual words (BOVW)

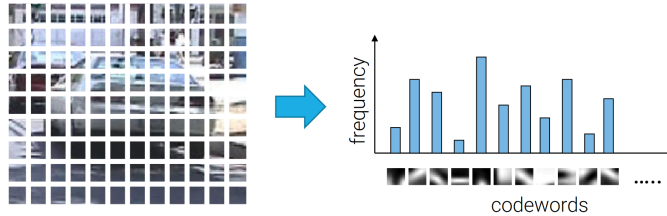

2.5 Neural networks

Shallow neural network Linear transformations with an activation function:

Shallow neural network

$$\begin{aligned} f(\mathbf{x}, \boldsymbol{\theta}) &= \mathbf{W}_2 \mathbf{h} + \mathbf{b}_2 \\ &= \mathbf{W}_2 \phi(\mathbf{W}_1 \mathbf{x} + \mathbf{b}_1) + \mathbf{b}_2 = \mathbf{s} \end{aligned}$$

where:

- $\boldsymbol{\theta} = (W_1 \in \mathbb{R}^{h \times i}, b_1 \in \mathbb{R}^h, W_2 \in \mathbb{R}^{c \times h}, b_2 \in \mathbb{R}^c)$ are the parameters of the linear transformations with an inner representation of size h .
- ϕ is an activation function.
- $\mathbf{h}$ and $\mathbf{s}$ are activations.

Activation function Function to introduce non-linearity.

Activation function

Remark. Without an activation function, a neural network is equivalent to a plain linear transformation.

Examples of activation functions are:

Sigmoid Defined as:

$$\sigma(a) = \frac{1}{1 + \exp(-a)} \quad \frac{\partial \sigma(a)}{\partial a} = \sigma(a)(1 - \sigma(a))$$

It is subject to the vanishing gradient problem.

Rectified linear unit (ReLU) Defined as:


$$\text{ReLU}(a) = \max\{0, a\} \quad \frac{\partial \text{ReLU}(a)}{\partial a} = \begin{cases} 1 & \text{if } a \geq 0 \\ 0 & \text{otherwise} \end{cases}$$

It is subject to the dead neuron problem for negative inputs.

Leaky ReLU Defined as:

$$\text{leaky_ReLU}(a) = \begin{cases} a & \text{if } a \geq 0 \\ 0.01 & \text{otherwise} \end{cases} \quad \frac{\partial \text{leaky_ReLU}(a)}{\partial a} = \begin{cases} 1 & \text{if } a \geq 0 \\ 0.01 & \text{otherwise} \end{cases}$$

Example (Linear separability). Linear transformations do not change the linear separability of the data points. A non-linear function can make linear separation possible.

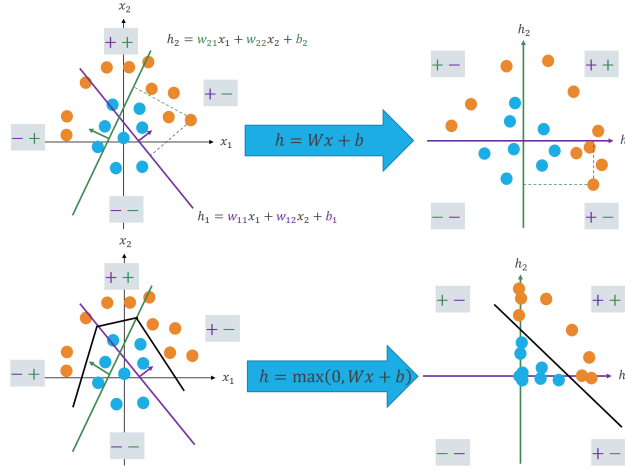

Deep neural network Multiple layers of linear transformations and activation functions:

Deep neural network

$$\begin{aligned}
 f(\mathbf{x}, \boldsymbol{\theta}) &= \mathbf{W}_L \mathbf{h}_{L-1} + \mathbf{b}_L \\
 &= \mathbf{W}_L \phi_L(\mathbf{W}_{L-1} \mathbf{h}_{L-2} + \mathbf{b}_{L-1}) + \mathbf{b}_L \\
 &= \mathbf{W}_L \phi_L(\mathbf{W}_{L-1} \phi_{L-1}(\cdots \phi_1(\mathbf{W}_1 \mathbf{x} + \mathbf{b}_1) \cdots) + \mathbf{b}_{L-1}) + \mathbf{b}_L = \mathbf{s}
 \end{aligned}$$

Depth Number of layers.

Width Number of activations at each layer.

2.6 Convolutional neural networks

2.6.1 Image filtering

Consider the case of vertical edge detection. Image filtering can be implemented through:

Fully-connected layer Use an FC layer to transform the image.

Image filtering with fully-connected layers

Given an image of size $H \times W$, the layer requires:

- $(H \cdot W) \cdot (H \cdot (W - 1)) \approx H^2 W^2$ parameters.
- $2(H \cdot W) \cdot (H \cdot (W - 1)) \approx 2H^2 W^2$ FLOPS (multiplications and additions).

Convolution/Correlation Use a convolution (more precisely, a cross-correlation) to transform the image.

Image filtering with convolutions

Remark. Convolutions preserve the spatial structure of the image, have shared parameters and extract local features.

Given an image of size $H \times W$, a convolution requires:

- 2 parameters.
- $3(H \cdot (W - 1)) \approx 3HW$ FLOPS.

Convolution matrix A convolution can be expressed as a multiplication matrix such that:

- The parameters are shared across rows.
- The resulting matrix is sparse.
- It adapts to varying input sizes.
- It is equivariant to translation (but not w.r.t. rotation and scale).

